



INTERACTIVE LINE


All In One Android Series

Create impressive space for all target audience

Indoor

Promote your corporate image with such detail and excellent visibility

With interactive screens, you can make extremely noticeable positioning. They are ideal products for changing the atmosphere of your environment and creating prestigious areas. Touch screens, which can be used in many areas such as entertainment, advertising, guidance and information, allow you to interact with your target audience.

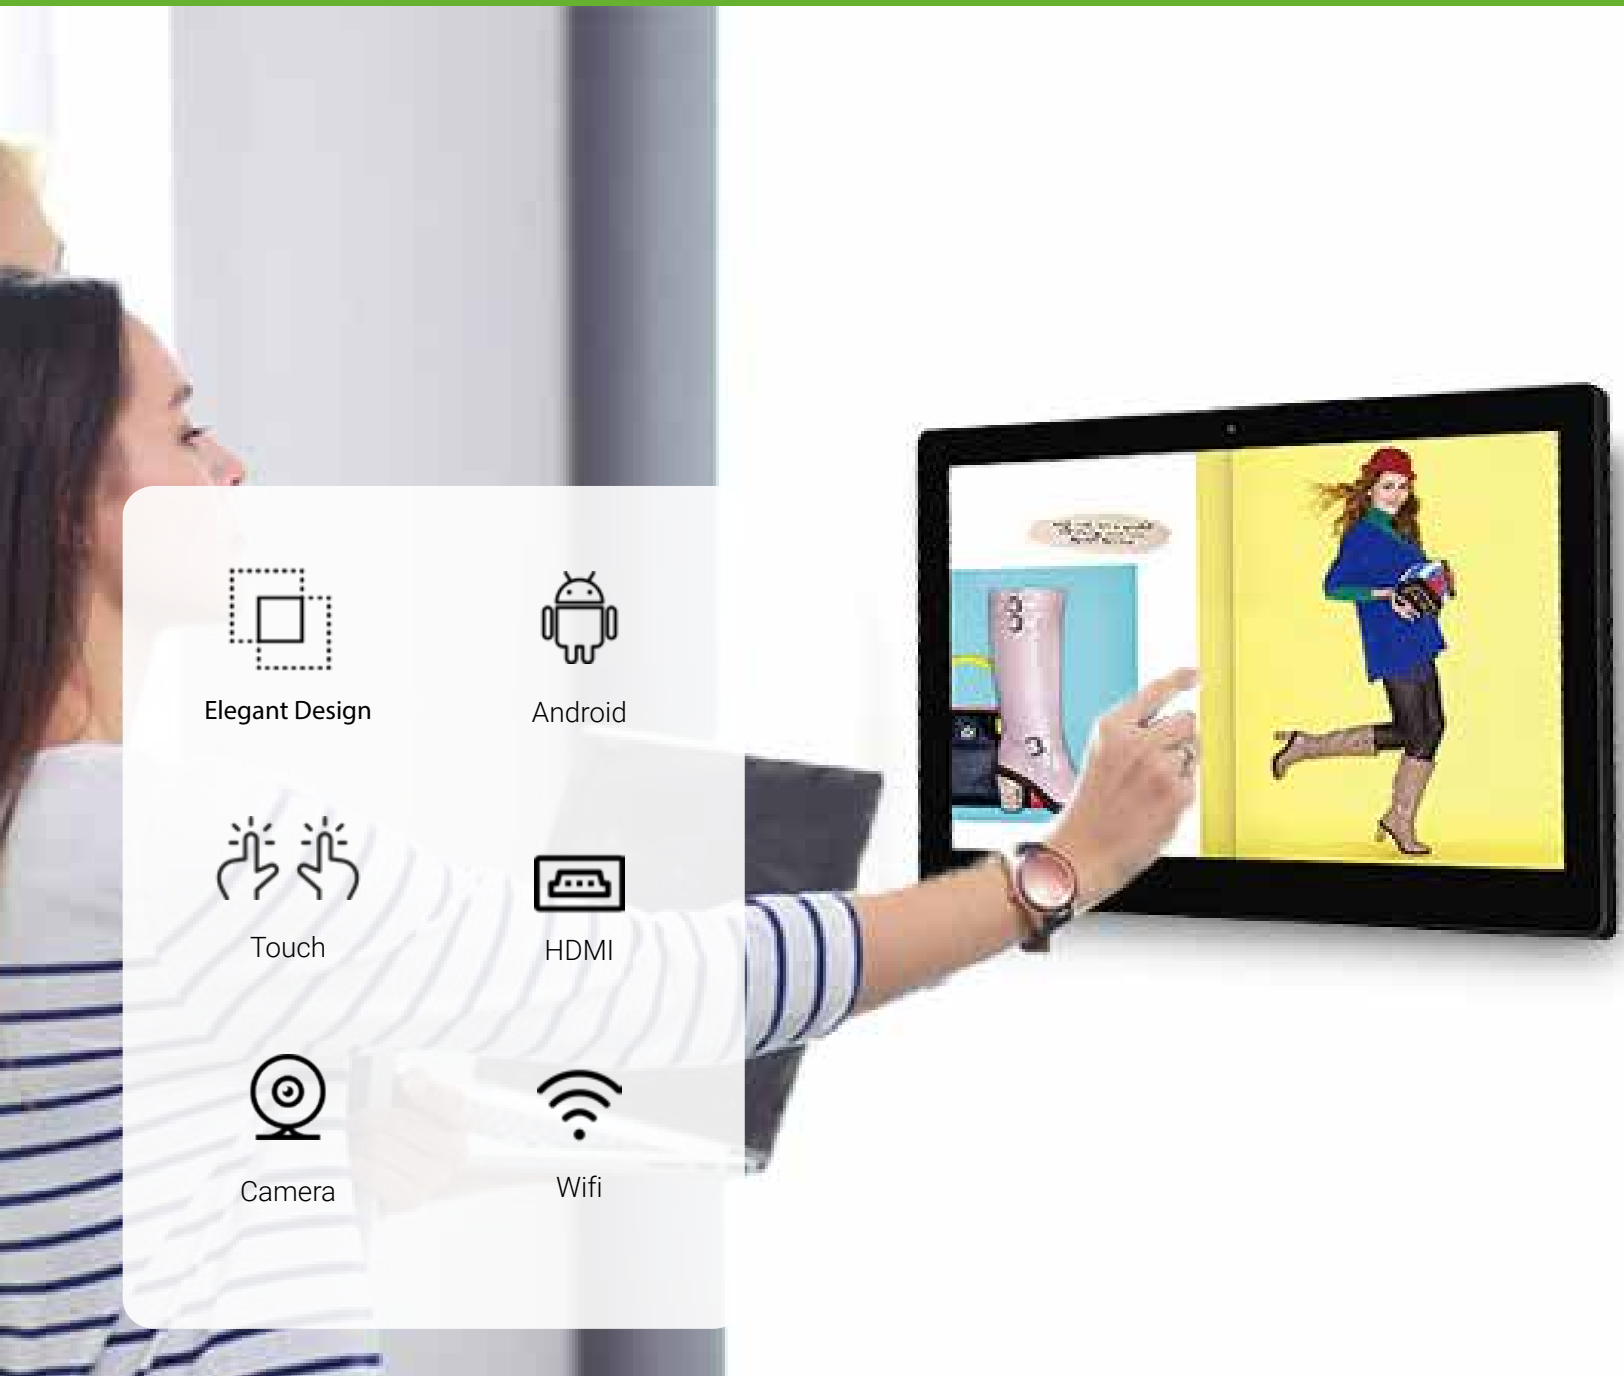

Present strikingly messaging with new generation digital solutions

At the same time, it includes the Android operating system and many functions and offers an extremely easy and effective use. In addition, you can maximize your usage performance with the sensitive touch screen.

Built in Wi-Fi

As well as having an Ethernet and LAN ports you can wirelessly connect to the internet thanks to the built in Wi-Fi.

High Brightness and Vibrant Colors

High brightness value in the range of 500-750nit to attract more attention to your contents and clear view from every point.

Optional Touch Technology

The most popular interactive applications durable and reliable touch technology for ease of use.

**Front Protection Glass**

It is manufactured from glass that is reinforced by chemical processes and is resistant to very high piercing. Provides additional protection against physical impact during use.

**Branding and Color Applications**

Provides you to highlight your corporate identity with unique color and logo application.

Long Life Industrial Display

Designed for use in commercial applications this screen can run 24/7. There are no external buttons or controls to avoid tampering.

PANEL	SS101EN-AP	SS121EN-AP	SS150EN-AP	SS156EN-AP	SS170EN-AP
Panel Size	10.1 "	12.1 "	15 "	15,6"	17"
Panel Type	60Hz ELED	60Hz ELED)	60Hz ELED	60Hz ELED	60Hz ELED
Resolution	1280×800	1024x768	1024x768	1024x768	1280x1024
Brightness (Typ.)	350cd/m2	350cd/m2	350cd/m2	350cd/m2	350cd/m2
Contrast	1300:1 (Typ.) (TM)	1300:1 (Typ.) (TM)	1300:1 (Typ.) (TM)	1300:1 (Typ.) (TM)	1300:1 (Typ.) (TM)
Viewing Angle (H x V)	170° x 170°	170° x 170°	170° x 170°	170° x 170°	170° x 170°
Response Time	14 ms (G to G)	14 ms (G to G)	14 ms (G to G)	14 ms (G to G)	14 ms (G to G)
Display Colors	16.7 Million	16.7 Million	16.7 Million	16.7 Million	16.7 Million
Applications	Horizontal/Vertical	Horizontal/Vertical	Horizontal/Vertical	Horizontal/Vertical	Horizontal/Vertical

PANEL CONNECTIVITY

Video Inputs	VGA, HDMI, DVI	VGA, HDMI, DVI	VGA, HDMI, DVI	VGA, HDMI, DVI	VGA, HDMI, DVI
Video Outputs	N/A	N/A	N/A	N/A	N/A

POWER

OS	Android 8.1	Android 8.1	Android 8.1	Android 8.1	Android 8.1
WiFi	802.11b/g/n	802.11b/g/n	802.11b/g/n	802.11b/g/n	802.11b/g/n
Ethernet	100M/1000M ethernet	100M/1000M ethernet	100M/1000M ethernet	100M/1000M ethernet	100M/1000M ethernet
Bluetooth	Bluetooth 4.0	Bluetooth 4.0	Bluetooth 4.0	Bluetooth 4.0	Bluetooth 4.0
Card slot	SD/MMC/MS	TF Card	SD/MMC/MS	SD/MMC/MS	SD/MMC
USB	USB Host 2.0	Touch USB	USB Host 2.0	USB Host 2.0	USB Host 2.0
Power Jack	DC 12V power input	DC 12V power input	DC 12V power input	AC100-240V	AC100-240V
Adapter	12V / 2A	12V / 2A	12V / 2A	12V / 2A	12V / 2A
Power Consumption	18 W	22 W	27 W	28W	31 W

OPERATION

VESA	100x100mm	100x100mm	100x100mm	100x100mm	100x100mm
Speaker	2*2W	2*2W	2*2W	2*2W	2*2W
Camera	2.0 MP, front camera	2.0 MP, front camera	2.0 MP, front camera	2.0 MP, front camera	2.0 MP, front camera
Operating temperature	0-50 degrees	0-40 degrees	0-40 degrees	0-40 degrees	0-40 degrees

CERTIFICATION AND COMPATIBILITY

Certificates	CE/FCC/RoHS	CE/FCC/RoHS	CE/FCC/RoHS	CE/FCC/RoHS	CE/FCC/RoHS
--------------	-------------	-------------	-------------	-------------	-------------

OPTIONAL ACCESSORIES

Full function remote control

PANEL	SS173EN-AP	SS185EN-AP	SS190EN-AP	SS215EN-AP
Panel Size	17,3"	18,5"	19"	21,5"
Screen Mode	60Hz ELED	60Hz ELED	60Hz ELED	60Hz ELED
Resolution	1920x1080	1920x1080	1280x1024	1920x1080
Brightness (Typ.)	350cd/m2	350cd/m2	350cd/m2	350cd/m2
Contrast	1300:1 (Typ.) (TM)	1300:1 (Typ.) (TM)	1300:1 (Typ.) (TM)	1300:1 (Typ.) (TM)
Viewing Angle (H x V)	170° x 170°	170° x 170°	170° x 170°	170° x 170°
Aspect Ratio	14 ms (G to G)	14 ms (G to G)	14 ms (G to G)	14 ms (G to G)
Frame Design	16.7 Million	16.7 Million	16.7 Million	16.7 Million
Applications	Horizontal/Vertical	Horizontal/Vertical	Horizontal/Vertical	Horizontal/Vertical

PANEL CONNECTIVITY

Video Inputs	VGA, HDMI, DVI	VGA, HDMI, DVI	VGA, HDMI, DVI	VGA, HDMI, DVI
Video Outputs	N/A	N/A	N/A	N/A

POWER

OS	Android 8.1	Android 8.1	Android 8.1	Android 8.1
WiFi	802.11b/g/n	802.11b/g/n	802.11b/g/n	802.11b/g/n
Ethernet	100M/1000M ethernet	100M/1000M ethernet	100M/1000M ethernet	100M/1000M ethernet
Bluetooth	Bluetooth 4.0	Bluetooth 4.0	Bluetooth 4.0	Bluetooth 4.0
Card slot	SD/MMC/MS	TF Card	SD/MMC/MS	SD/MMC/MS
USB	USB Host 2.0	Touch USB	USB Host 2.0	USB Host 2.0
Power Jack	DC 12V power input	DC 12V power input	DC 12V power input	AC100-240V
Adapter	12V / 2A	12V / 2A	12V / 2A	12V / 2A
Power Consumption	36 W	42W	42 W	49W

OPERATION

VESA	100x100mm	100x100mm	100x100mm	400x400mm
Speaker	2*2W	2*2W	2*2W	2*2W
Camera	2.0 MP, front camera	2.0 MP, front camera	2.0 MP, front camera	2.0 MP, front camera
Operating temperature	0-50 degrees	0-40 degrees	0-40 degrees	0-50 degrees

CERTIFICATION AND COMPATIBILITY

Certificates	CE/FCC/RoHS	CE/FCC/RoHS	CE/FCC/RoHS	CE/FCC/RoHS
--------------	-------------	-------------	-------------	-------------

OPTIONAL ACCESSORIES

Full function remote control				
------------------------------	--	--	--	--



unisigns



unisigns



unisigns



unisign

www.unisign.com.tr

info@unisign.com.tr



INTERACTIVE LINE

All In One Android Series