



LED BILLBOARD


Led Series

Create impressive space for all target audience

Outdoor

Promote your corporate image with such detail and excellent visibility

Outdoor LED Display is designed and built to withstand adverse weather conditions and provide a truly breathtaking outdoor LED display option you can depend on.

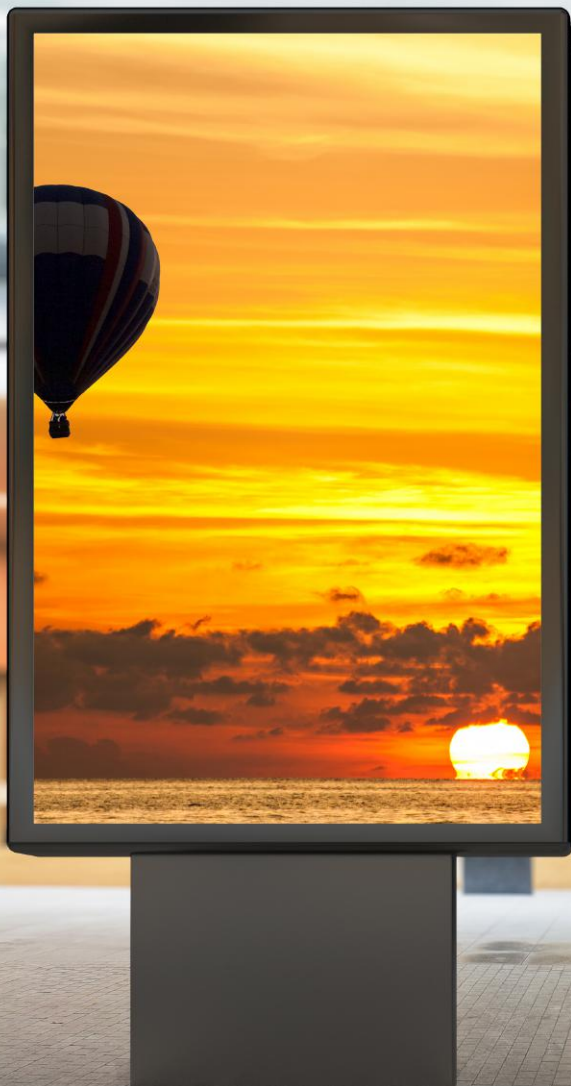

Elegant Design



Manage Contents



24/7 working



Energy efficient technology



High Brightness



Remote Control

Present strikingly messaging with new generation digital solutions





Unisign Led can be easily adapted and developed not only for several applications but also every sectors. It enables interaction with multimedia content, maps, information, advertising posters, websites, videos and more.

Safe and Long Lasting Connection Equipment

Unisign LED display utilizes data and power connections that are 100% water tight allowing for stable and reliable connections between each outdoor LED display cabinet.



LED BILLBOARDS

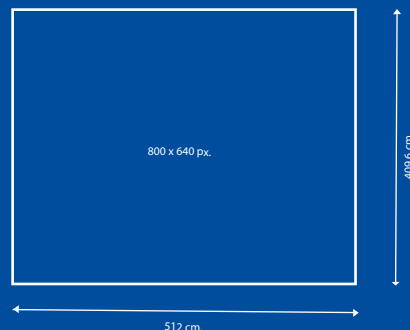

LBS640



LBM640



LBL640



LBX640



PANEL

Pixel Pitch	6.4 mm.	6.4 mm.	6.4 mm.	6.4 mm.
Panel Size	307,2 x 204,8 cm.	307,2 x 307,2 cm.	409,6 x 307,2 cm.	512 x 409,6 cm.
Led Type	SMD 3in1 LED	SMD 3in1 LED	SMD 3in1 LED	SMD 3in1 LED
Resolution	480 x 320 px.	480 x 480 px.	640 x 480 px.	800 x 640 px.
Brightness (Typ.)	6000 cd/m²	6000 cd/m²	6000 cd/m²	6000 cd/m²
Viewing Angle (H x V)	120° x 120°	120° x 120°	120° x 120°	120° x 120°
Refresh Rate	1920 Hz.	1920 Hz.	1920 Hz.	1920 Hz.

PANEL CONNECTIVITY

Video Input	DVI	DVI	DVI	DVI
Video Output	N/A	N/A	N/A	N/A
Audio Input / Output	N/A	N/A	N/A	N/A

POWER

Power Type	Internal	Internal	Internal	Internal
Power Requirement	AC 110 - 220 V~ (+/- 10 %), 50/60 Hz	AC 110 - 220 V~ (+/- 10 %), 50/60 Hz	AC 110 - 220 V~ (+/- 10 %), 50/60 Hz	AC 110 - 220 V~ (+/- 10 %), 50/60 Hz
Power Consumption	5400 W	8100 W	10800 W	18000 W
Standby Mode	<0,5W	<0,5W	<0,5W	<0,5W

DIMENSIONS

Product size(mm)	2560 x 1280	3840 x 1920	5120 x 2560	3840 x 1280
Package Size (mm)	2700 x 1400	4000 x 2100	5250 x 2700	4000 x 1400

OPERATION

Operation Life	7/24 - 50.000 hours	7/24 - 50.000 hours	7/24 - 50.000 hours	7/24 - 50.000 hours
Working Conditions	Operation Temp.: -20~ 40 °C	Operation Temp.: -20~ 40 °C	Operation Temp.: -20~ 40 °C	Operation Temp.: -20~ 40 °C
Humidity	10 ~ 80%	10 ~ 80%	10 ~ 80%	10 ~ 80%

CERTIFICATION AND COMPATIBILITY

Safety	EN60950-1	EN60950-1	EN60950-1	EN60950-1
EMC	Class A	Class A	Class A	Class A
Environment	ENERGY STAR 6.0 (USA)	ENERGY STAR 6.0 (USA)	ENERGY STAR 6.0 (USA)	ENERGY STAR 6.0 (USA)

OPTIONAL ACCESSORIES

Protection Glass Overlay, Protection Glare Overlay

OTHER

Included in Pocket	Easy Installation Guide, Warranty Document, Power Cable (Other Accessories Externally)
--------------------	--



digital signage & display solutions



unisigns



unisigns



unisigns



unisign

www.unisign.com.tr

info@unisign.com.tr



LED

Billboard Series