21.5–43" K Model Indoor Digital Totem

Architectural form. Connected performance.

A bold, angular indoor totem series with Android or Windows configurations, optional PCAP interaction and five size options from 21.5" to 43".





300–700 nits
By size

Full HD
Resolution

PCAP option
Optional

Android / PC
Configuration


5 sizes
Compare variants

Choose the size, computing configuration and project options around your space and content.

unisign Display Technology

Made for your space.
Built around your content.



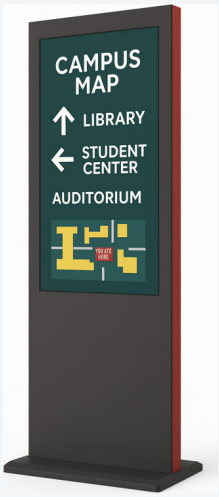

Android or Windows. A platform for your workflow.

Select the display size and computing configuration independently. Each size has its own panel specification. Android and Windows are available as alternative project configurations.

Choice of computing platform

Android: Rockchip, 2/4 GB RAM and 16/32 GB storage. Windows: Intel Core i3/i5/i7, 4/8/16 GB RAM and 128–512 GB SSD.

Display performance by size

Resolution, brightness, active area, contrast and response time are listed separately for every model code and screen size.

Connected deployments

Network and I/O depend on the selected platform. Compare Android and Windows specifications before defining the installation.

A distinctive physical format

An angular, full-height enclosure creates a strong visual presence. The selected size determines body proportions and dimensions.

Retail **Hotels** **Corporate** **Exhibitions**

unisign / Display Technology

Technical clarity for confident deployment.

TKAS215MA | 21.5" Indoor Digital Totem

Display & Application

Panel	21.5" TFT LCD
Resolution	1920 × 1080
Brightness	500 nits
Active area	476.064 × 267.786 mm
Contrast	1000:1 typ.
Response time	14 ms (G-to-G)
Viewing angle	89/89/89/89 (L/R/U/D)
Aspect ratio	16:9
Touch option	PCAP optional
Orientation	Portrait
Application	Indoor

System, Network & I/O

Processor	A: Rockchip W: Intel Core i3/i5/i7
RAM	A: 2 / 4 GB W: 4 / 8 / 16 GB
Internal storage	A: 16 / 32 GB W: 128–512 GB SSD
Operating system	A: Android W: Windows 10/11 Pro
Wi-Fi	A: 802.11 b/g/n/ac W: 802.11ac
Ethernet	A: 10/100M, managed W: Gigabit Ethernet
Bluetooth	A: 4.1 W: 4.2 / 5.0 options
Card slot	A: SD W: SD / microSD
HDMI	HDMI Out
USB	A: USB 3.0 W: USB 3.0 + 2.0
Audio	3.5 mm audio + microphone

Media & Functions

Video	A: MPEG-1/2/4, H.263/264, VC1, RV; 4K W: MPEG-1/2/4, H.264/265, AVI, MKV; 4K
Audio	A: MP3/WMA/AAC; W: MP3/WAV/AAC
Images	A: JPEG/BMP; W: JPEG/PNG
Language	Multi-language
Kiosk mode	Supported

Mechanical & Environment

Dimensions	Confirm - source conflict*
Operating temp.	0–50 °C
Humidity	10%–80%
Speaker	Optional
Depth note	Body only; base unpublished

Built for more than one deployment model

Multi-format media · **Kiosk mode** · **Flexible I/O**


* Dimensions conflict between the website table and measurement image. See source audit.

unisign / Display Technology


Engineering dimensions for installation.

TKAS215MA | Schematic front and side views based on published data.

FRONT VIEW

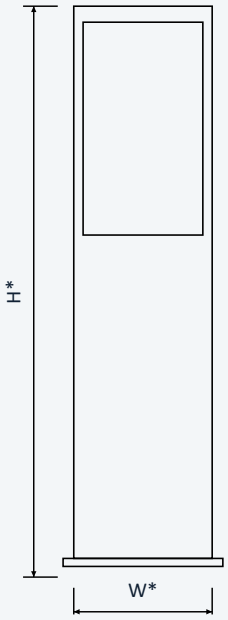

SIDE / BODY VIEW



Schematic views; no fixing-hole or base-depth specification.

OVERALL WIDTH
Confirm*

OVERALL HEIGHT
Confirm*

BODY DEPTH
Confirm*

INSTALLATION
Floor-standing





Installation planning

Published dimensions

The table and measurement image disagree. No final dimension is approved here.

Drawing scope

Schematic only. Fixing holes, tolerances and unpublished base details need an approved production drawing.

*** Conflicting source dimensions are listed in the accompanying audit.**

unisign / Display Technology

Technical clarity for confident deployment.

TKAS238EA | 23.8" Indoor Digital Totem

Display & Application

Panel	23.8" TFT LCD
Resolution	1920 × 1080
Brightness	550 nits
Active area	527.04 × 296.46 mm
Contrast	1000:1 typ.
Response time	14 ms (G-to-G)
Viewing angle	89/89/89/89 (L/R/U/D)
Aspect ratio	16:9
Touch option	PCAP optional
Orientation	Portrait
Application	Indoor

System, Network & I/O

Processor	A: Rockchip W: Intel Core i3/i5/i7
RAM	A: 2 / 4 GB W: 4 / 8 / 16 GB
Internal storage	A: 16 / 32 GB W: 128–512 GB SSD
Operating system	A: Android W: Windows 10/11 Pro
Wi-Fi	A: 802.11 b/g/n/ac W: 802.11ac
Ethernet	A: 10/100M, managed W: Gigabit Ethernet
Bluetooth	A: 4.1 W: 4.2 / 5.0 options
Card slot	A: SD W: SD / microSD
HDMI	HDMI Out
USB	A: USB 3.0 W: USB 3.0 + 2.0
Audio	3.5 mm audio + microphone

Media & Functions

Video	A: MPEG-1/2/4, H.263/264, VC1, RV; 4K W: MPEG-1/2/4, H.264/265, AVI, MKV; 4K
Audio	A: MP3/WMA/AAC; W: MP3/WAV/AAC
Images	A: JPEG/BMP; W: JPEG/PNG
Language	Multi-language
Kiosk mode	Supported

Mechanical & Environment

Dimensions	1700 × 415 × 70 mm
Operating temp.	0–50 °C
Humidity	10%–80%
Speaker	Optional
Depth note	Body only; base unpublished

Built for more than one deployment model


Multi-format media · **Kiosk mode** · **Flexible I/O**

A = Android; W = Windows. Alternative project configurations.


Engineering dimensions for installation.

TKAS238EA | Schematic front and side views based on published data.

FRONT VIEW

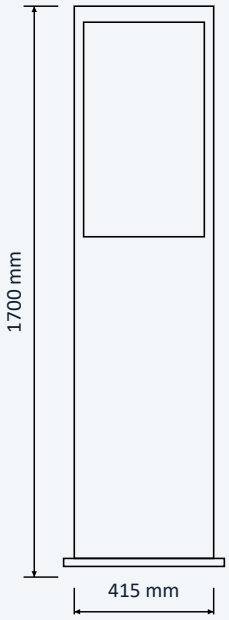

SIDE / BODY VIEW



Schematic views; no fixing-hole or base-depth specification.

OVERALL WIDTH
415 mm

OVERALL HEIGHT
1700 mm

BODY DEPTH
70 mm

INSTALLATION
Floor-standing





Installation planning

Published dimensions

Height, width and body depth follow the model table. Base depth is only published for Flip.

Drawing scope

Schematic only. Fixing holes, tolerances and unpublished base details need an approved production drawing.

Let us define the right mounting and system configuration for your project.

unisign /Display Technology

Technical clarity for confident deployment.

TKAS270EA | 27" Indoor Digital Totem

Display & Application

Panel	27" TFT LCD
Resolution	1920 × 1080
Brightness	300 nits
Active area	597.888 × 336.312 mm
Contrast	1000:1 typ.
Response time	14 ms (G-to-G)
Viewing angle	89/89/89/89 (L/R/U/D)
Aspect ratio	16:9
Touch option	PCAP optional
Orientation	Portrait
Application	Indoor

System, Network & I/O

Processor	A: Rockchip W: Intel Core i3/i5/i7
RAM	A: 2 / 4 GB W: 4 / 8 / 16 GB
Internal storage	A: 16 / 32 GB W: 128–512 GB SSD
Operating system	A: Android W: Windows 10/11 Pro
Wi-Fi	A: 802.11 b/g/n/ac W: 802.11ac
Ethernet	A: 10/100M, managed W: Gigabit Ethernet
Bluetooth	A: 4.1 W: 4.2 / 5.0 options
Card slot	A: SD W: SD / microSD
HDMI	HDMI Out
USB	A: USB 3.0 W: USB 3.0 + 2.0
Audio	3.5 mm audio + microphone

Media & Functions

Video	A: MPEG-1/2/4, H.263/264, VC1, RV; 4K W: MPEG-1/2/4, H.264/265, AVI, MKV; 4K
Audio	A: MP3/WMA/AAC; W: MP3/WAV/AAC
Images	A: JPEG/BMP; W: JPEG/PNG
Language	Multi-language
Kiosk mode	Supported

Mechanical & Environment

Dimensions	1725 × 455 × 70 mm
Operating temp.	0–50 °C
Humidity	10%–80%
Speaker	Optional
Depth note	Body only; base unpublished

Built for more than one deployment model


Multi-format media · **Kiosk mode** · **Flexible I/O**

A = Android; W = Windows. Alternative project configurations.


Engineering dimensions for installation.

TKAS270EA | Schematic front and side views based on published data.

FRONT VIEW

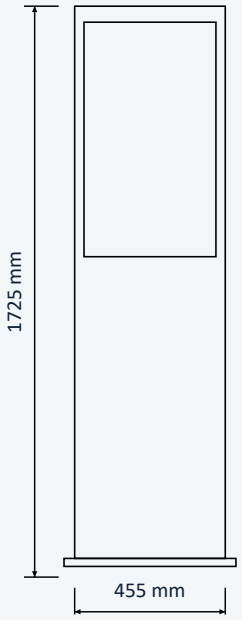

SIDE / BODY VIEW



Schematic views; no fixing-hole or base-depth specification.

OVERALL WIDTH
455 mm

OVERALL HEIGHT
1725 mm

BODY DEPTH
70 mm

INSTALLATION
Floor-standing





Installation planning

Published dimensions

Height, width and body depth follow the model table. Base depth is only published for Flip.

Drawing scope

Schematic only. Fixing holes, tolerances and unpublished base details need an approved production drawing.

Let us define the right mounting and system configuration for your project.

unisign / Display Technology

Technical clarity for confident deployment.

TKAS320MA | 32" Indoor Digital Totem

Display & Application

Panel	32" TFT LCD
Resolution	1920 × 1080
Brightness	400 nits
Active area	698.40 × 392.85 mm
Contrast	1200:1 typ.
Response time	8 ms (G-to-G)
Viewing angle	89/89/89/89 (L/R/U/D)
Aspect ratio	16:9
Touch option	PCAP optional
Orientation	Portrait
Application	Indoor

System, Network & I/O

Processor	A: Rockchip W: Intel Core i3/i5/i7
RAM	A: 2 / 4 GB W: 4 / 8 / 16 GB
Internal storage	A: 16 / 32 GB W: 128–512 GB SSD
Operating system	A: Android W: Windows 10/11 Pro
Wi-Fi	A: 802.11 b/g/n/ac W: 802.11ac
Ethernet	A: 10/100M, managed W: Gigabit Ethernet
Bluetooth	A: 4.1 W: 4.2 / 5.0 options
Card slot	A: SD W: SD / microSD
HDMI	HDMI Out
USB	A: USB 3.0 W: USB 3.0 + 2.0
Audio	3.5 mm audio + microphone

Media & Functions

Video	A: MPEG-1/2/4, H.263/264, VC1, RV; 4K W: MPEG-1/2/4, H.264/265, AVI, MKV; 4K
Audio	A: MP3/WMA/AAC; W: MP3/WAV/AAC
Images	A: JPEG/BMP; W: JPEG/PNG
Language	Multi-language
Kiosk mode	Supported

Mechanical & Environment

Dimensions	Confirm - source conflict*
Operating temp.	0–50 °C
Humidity	10%–80%
Speaker	Optional
Depth note	Body only; base unpublished

Built for more than one deployment model


Multi-format media · **Kiosk mode** · **Flexible I/O**

* Dimensions conflict between the website table and measurement image. See source audit.

Engineering dimensions for installation.

TKAS320MA | Schematic front and side views based on published data.

FRONT VIEW

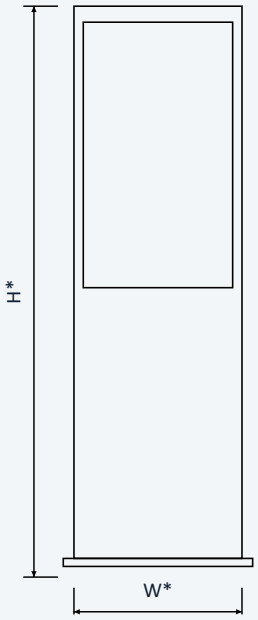

SIDE / BODY VIEW



Schematic views; no fixing-hole or base-depth specification.

OVERALL WIDTH	OVERALL HEIGHT	BODY DEPTH	INSTALLATION
Confirm*	**Confirm***	**Confirm***	**Floor-standing**





Installation planning

Published dimensions

The table and measurement image disagree. No final dimension is approved here.

Drawing scope

Schematic only. Fixing holes, tolerances and unpublished base details need an approved production drawing.

*** Conflicting source dimensions are listed in the accompanying audit.**

unisign / Display Technology

Technical clarity for confident deployment.

TKAS430HA | 43" Indoor Digital Totem

Display & Application

Panel	43" TFT LCD
Resolution	1920 × 1080
Brightness	700 nits
Active area	940.89 × 529.25 mm
Contrast	1200:1 typ.
Response time	8 ms (G-to-G)
Viewing angle	89/89/89/89 (L/R/U/D)
Aspect ratio	16:9
Touch option	PCAP optional
Orientation	Portrait
Application	Indoor

System, Network & I/O

Processor	A: Rockchip W: Intel Core i3/i5/i7
RAM	A: 2 / 4 GB W: 4 / 8 / 16 GB
Internal storage	A: 16 / 32 GB W: 128–512 GB SSD
Operating system	A: Android W: Windows 10/11 Pro
Wi-Fi	A: 802.11 b/g/n/ac W: 802.11ac
Ethernet	A: 10/100M, managed W: Gigabit Ethernet
Bluetooth	A: 4.1 W: 4.2 / 5.0 options
Card slot	A: SD W: SD / microSD
HDMI	HDMI Out
USB	A: USB 3.0 W: USB 3.0 + 2.0
Audio	3.5 mm audio + microphone

Media & Functions

Video	A: MPEG-1/2/4, H.263/264, VC1, RV; 4K W: MPEG-1/2/4, H.264/265, AVI, MKV; 4K
Audio	A: MP3/WMA/AAC; W: MP3/WAV/AAC
Images	A: JPEG/BMP; W: JPEG/PNG
Language	Multi-language
Kiosk mode	Supported

Mechanical & Environment

Dimensions	Confirm - source conflict*
Operating temp.	0–50 °C
Humidity	10%–80%
Speaker	Optional
Depth note	Body only; base unpublished

Built for more than one deployment model


Multi-format media · **Kiosk mode** · **Flexible I/O**

* Dimensions conflict between the website table and measurement image. See source audit.

Engineering dimensions for installation.

TKAS430HA | Schematic front and side views based on published data.

FRONT VIEW

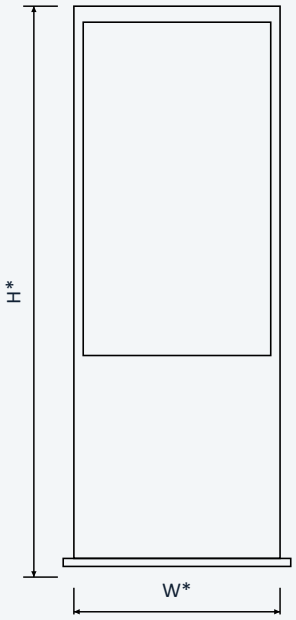

SIDE / BODY VIEW



Schematic views; no fixing-hole or base-depth specification.

OVERALL WIDTH
Confirm*

OVERALL HEIGHT
Confirm*

BODY DEPTH
Confirm*

INSTALLATION
Floor-standing





Installation planning

Published dimensions

The table and measurement image disagree. No final dimension is approved here.

Drawing scope


Schematic only. Fixing holes, tolerances and unpublished base details need an approved production drawing.

*** Conflicting source dimensions are listed in the accompanying audit.**

unisign Display Technology

Configure the platform. Personalise the presence.



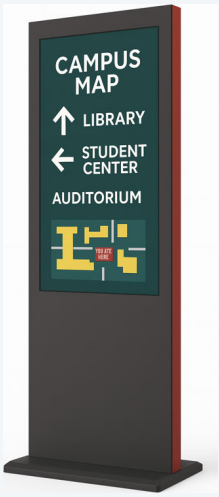

Options defined around the project

Select the computing platform, interaction and branding requirements together. Available options and peripherals must be confirmed for the exact product code before ordering.

Android or Windows

The two platforms offer different CPU, memory, storage, networking and interface specifications. Choose the configuration for your workflow.

PCAP interaction

Optional PCAP touch is described in the series overview. Confirm the touch specification and software compatibility for the selected model.

Colour and branding

Colour, logo and branding options help coordinate the physical unit with the project. Final finishes are defined in the quotation.

Optional sound

An optional speaker is listed. Confirm sound requirements, hardware scope and the final configuration before ordering.

Platform | Interaction | Branding | Configuration