32–75" O Model Indoor Digital Totem

Rounded form. Clear communication.

A refined freestanding totem with Android and Windows configuration options, portrait visuals and a choice of five sizes for indoor spaces.



400–800 nits
By size

FHD / 4K
Resolution

PCAP option
Optional

Android / PC
Configuration


5 sizes
Compare variants

Choose the size, computing configuration and project options around your space and content.

unisign Display Technology

Made for your space.
Built around your content.



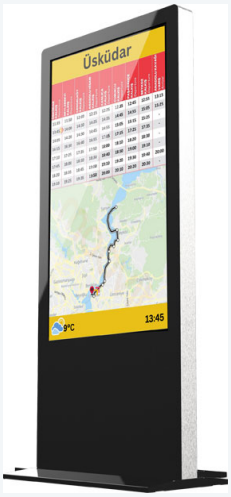



Android or Windows. A platform for your workflow.

Select the display size and computing configuration independently. Each size has its own panel specification. Android and Windows are available as alternative project configurations.

Choice of computing platform

Android: Rockchip, 2/4 GB RAM and 16/32 GB storage. Windows: Intel Core i3/i5/i7, 4/8/16 GB RAM and 128–512 GB SSD.

Display performance by size

Resolution, brightness, active area, contrast and response time are listed separately for every model code and screen size.

Connected deployments

Network and I/O depend on the selected platform. Compare Android and Windows specifications before defining the installation.

A distinctive physical format

Rounded housing and a freestanding base create a clean indoor presentation. Confirm overall dimensions for the selected size.

Retail **Hotels** **Corporate** **Exhibitions**

unisign /Display Technology

Technical clarity for confident deployment.

TOAS320MA | 32" Indoor Digital Totem

Display & Application

Panel	32" TFT LCD
Resolution	1920 × 1080
Brightness	400 nits
Active area	698.40 × 392.85 mm
Contrast	1200:1 typ.
Response time	8 ms (G-to-G)
Viewing angle	89/89/89/89 (L/R/U/D)
Aspect ratio	16:9
Touch option	PCAP optional
Orientation	Portrait
Application	Indoor

System, Network & I/O

Processor	A: Rockchip W: Intel Core i3/i5/i7
RAM	A: 2 / 4 GB W: 4 / 8 / 16 GB
Internal storage	A: 16 / 32 GB W: 128–512 GB SSD
Operating system	A: Android W: Windows 10/11 Pro
Wi-Fi	A: 802.11 b/g/n/ac W: 802.11ac
Ethernet	A: 10/100M, managed W: Gigabit Ethernet
Bluetooth	A: 4.1 W: 4.2 / 5.0 options
Card slot	A: SD W: SD / microSD
HDMI	HDMI Out
USB	A: USB 3.0 W: USB 3.0 + 2.0
Audio	3.5 mm audio + microphone

Media & Functions

Video	A: MPEG-1/2/4, H.263/264, VC1, RV; 4K W: MPEG-1/2/4, H.264/265, AVI, MKV; 4K
Audio	A: MP3/WMA/AAC; W: MP3/WAV/AAC
Images	A: JPEG/BMP; W: JPEG/PNG
Language	Multi-language
Kiosk mode	Supported

Mechanical & Environment

Dimensions	Confirm - source conflict*
Operating temp.	0–50 °C
Humidity	10%–80%
Speaker	Optional
Depth note	Body only; base unpublished

Built for more than one deployment model

Multi-format media · **Kiosk mode** · **Flexible I/O**


* Dimensions conflict between the website table and measurement image. See source audit.

unisign / Display Technology

Engineering dimensions for installation.

TOAS320MA | Schematic front and side views based on published data.

FRONT VIEW

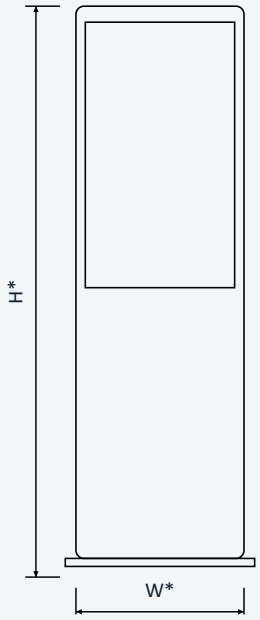


SIDE / BODY VIEW



Schematic views; no fixing-hole or base-depth specification.

OVERALL WIDTH	OVERALL HEIGHT	BODY DEPTH	INSTALLATION
Confirm*	**Confirm***	**Confirm***	**Floor-standing**



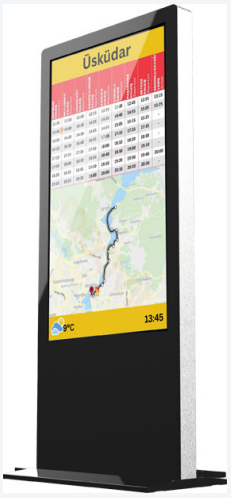

Installation planning

Published dimensions

The table and measurement image disagree. No final dimension is approved here.

Drawing scope

Schematic only. Fixing holes, tolerances and unpublished base details need an approved production drawing.

*** Conflicting source dimensions are listed in the accompanying audit.**

unisign / Display Technology

Technical clarity for confident deployment.

TOAS430HA | 43" Indoor Digital Totem

Display & Application

Panel	43" TFT LCD
Resolution	1920 × 1080
Brightness	700 nits
Active area	940.89 × 529.25 mm
Contrast	1200:1 typ.
Response time	8 ms (G-to-G)
Viewing angle	89/89/89/89 (L/R/U/D)
Aspect ratio	16:9
Touch option	PCAP optional
Orientation	Portrait
Application	Indoor

System, Network & I/O

Processor	A: Rockchip W: Intel Core i3/i5/i7
RAM	A: 2 / 4 GB W: 4 / 8 / 16 GB
Internal storage	A: 16 / 32 GB W: 128–512 GB SSD
Operating system	A: Android W: Windows 10/11 Pro
Wi-Fi	A: 802.11 b/g/n/ac W: 802.11ac
Ethernet	A: 10/100M, managed W: Gigabit Ethernet
Bluetooth	A: 4.1 W: 4.2 / 5.0 options
Card slot	A: SD W: SD / microSD
HDMI	HDMI Out
USB	A: USB 3.0 W: USB 3.0 + 2.0
Audio	3.5 mm audio + microphone

Media & Functions

Video	A: MPEG-1/2/4, H.263/264, VC1, RV; 4K W: MPEG-1/2/4, H.264/265, AVI, MKV; 4K
Audio	A: MP3/WMA/AAC; W: MP3/WAV/AAC
Images	A: JPEG/BMP; W: JPEG/PNG
Language	Multi-language
Kiosk mode	Supported

Mechanical & Environment

Dimensions	Confirm - source conflict*
Operating temp.	0–50 °C
Humidity	10%–80%
Speaker	Optional
Depth note	Body only; base unpublished

Built for more than one deployment model

Multi-format media · **Kiosk mode** · **Flexible I/O**


* Dimensions conflict between the website table and measurement image. See source audit.

unisign / Display Technology

Engineering dimensions for installation.

TOAS430HA | Schematic front and side views based on published data.

FRONT VIEW

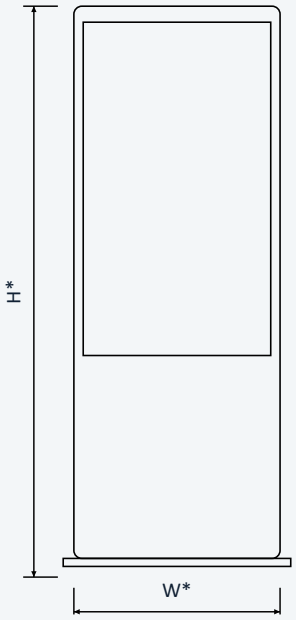


SIDE / BODY VIEW



Schematic views; no fixing-hole or base-depth specification.

OVERALL WIDTH	OVERALL HEIGHT	BODY DEPTH	INSTALLATION
Confirm*	**Confirm***	**Confirm***	**Floor-standing**



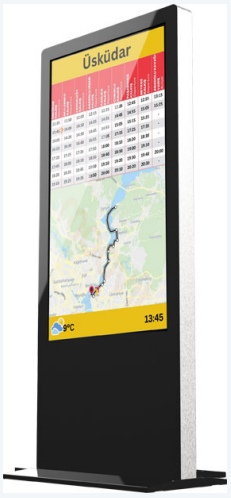

Installation planning

Published dimensions

The table and measurement image disagree. No final dimension is approved here.

Drawing scope

Schematic only. Fixing holes, tolerances and unpublished base details need an approved production drawing.

*** Conflicting source dimensions are listed in the accompanying audit.**

unisign / Display Technology

Technical clarity for confident deployment.

TOAS550HQ | 55" Indoor Digital Totem

Display & Application

Panel	55" TFT LCD
Resolution	3840 × 2160
Brightness	800 nits
Active area	1209.60 × 680.4 mm
Contrast	1200:1 typ.
Response time	8 ms (G-to-G)
Viewing angle	89/89/89/89 (L/R/U/D)
Aspect ratio	16:9
Touch option	PCAP optional
Orientation	Portrait
Application	Indoor

System, Network & I/O

Processor	A: Rockchip W: Intel Core i3/i5/i7
RAM	A: 2 / 4 GB W: 4 / 8 / 16 GB
Internal storage	A: 16 / 32 GB W: 128–512 GB SSD
Operating system	A: Android W: Windows 10/11 Pro
Wi-Fi	A: 802.11 b/g/n/ac W: 802.11ac
Ethernet	A: 10/100M, managed W: Gigabit Ethernet
Bluetooth	A: 4.1 W: 4.2 / 5.0 options
Card slot	A: SD W: SD / microSD
HDMI	HDMI Out
USB	A: USB 3.0 W: USB 3.0 + 2.0
Audio	3.5 mm audio + microphone

Media & Functions

Video	A: MPEG-1/2/4, H.263/264, VC1, RV; 4K W: MPEG-1/2/4, H.264/265, AVI, MKV; 4K
Audio	A: MP3/WMA/AAC; W: MP3/WAV/AAC
Images	A: JPEG/BMP; W: JPEG/PNG
Language	Multi-language
Kiosk mode	Supported

Mechanical & Environment

Dimensions	Confirm - source conflict*
Operating temp.	0–50 °C
Humidity	10%–80%
Speaker	Optional
Depth note	Body only; base unpublished

Built for more than one deployment model

Multi-format media · **Kiosk mode** · **Flexible I/O**


* Dimensions conflict between the website table and measurement image. See source audit.

unisign / Display Technology

Engineering dimensions for installation.

TOAS550HQ | Schematic front and side views based on published data.

FRONT VIEW

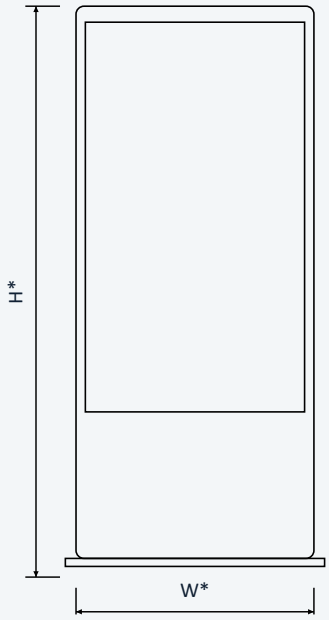


SIDE / BODY VIEW



Schematic views; no fixing-hole or base-depth specification.

OVERALL WIDTH	OVERALL HEIGHT	BODY DEPTH	INSTALLATION
Confirm*	Confirm*	Confirm*	Floor-standing



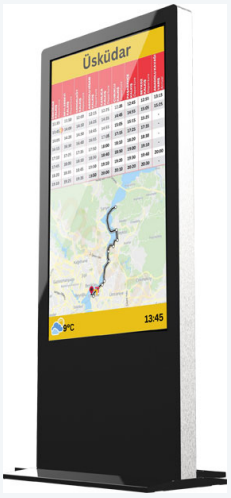

Installation planning

Published dimensions

The table and measurement image disagree. No final dimension is approved here.

Drawing scope

Schematic only. Fixing holes, tolerances and unpublished base details need an approved production drawing.

*** Conflicting source dimensions are listed in the accompanying audit.**

unisign / Display Technology

Technical clarity for confident deployment.

TOAS650MQ | 65" Indoor Digital Totem

Display & Application

Panel	65" TFT LCD
Resolution	3840 × 2160
Brightness	500 nits
Active area	1428.48 × 803.52 mm
Contrast	4000:1 typ.
Response time	8 ms (G-to-G)
Viewing angle	89/89/89/89 (L/R/U/D)
Aspect ratio	16:9
Touch option	PCAP optional
Orientation	Portrait
Application	Indoor

System, Network & I/O

Processor	A: Rockchip W: Intel Core i3/i5/i7
RAM	A: 2 / 4 GB W: 4 / 8 / 16 GB
Internal storage	A: 16 / 32 GB W: 128–512 GB SSD
Operating system	A: Android W: Windows 10/11 Pro
Wi-Fi	A: 802.11 b/g/n/ac W: 802.11ac
Ethernet	A: 10/100M, managed W: Gigabit Ethernet
Bluetooth	A: 4.1 W: 4.2 / 5.0 options
Card slot	A: SD W: SD / microSD
HDMI	HDMI Out
USB	A: USB 3.0 W: USB 3.0 + 2.0
Audio	3.5 mm audio + microphone

Media & Functions

Video	A: MPEG-1/2/4, H.263/264, VC1, RV; 4K W: MPEG-1/2/4, H.264/265, AVI, MKV; 4K
Audio	A: MP3/WMA/AAC; W: MP3/WAV/AAC
Images	A: JPEG/BMP; W: JPEG/PNG
Language	Multi-language
Kiosk mode	Supported

Mechanical & Environment

Dimensions	2000 × 925 × 60 mm
Operating temp.	0–50 °C
Humidity	10%–80%
Speaker	Optional
Depth note	Body only; base unpublished

Built for more than one deployment model


Multi-format media · **Kiosk mode** · **Flexible I/O**

A = Android; W = Windows. Alternative project configurations.


Engineering dimensions for installation.

TOAS650MQ | Schematic front and side views based on published data.

FRONT VIEW

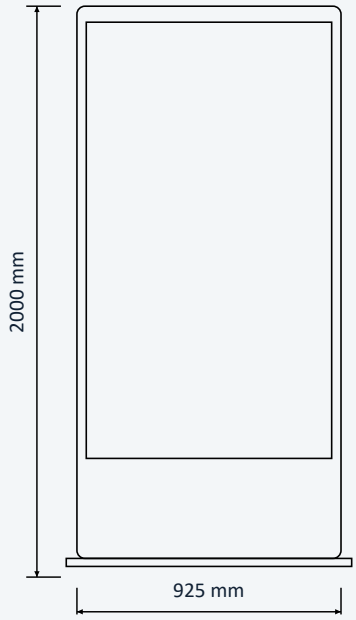


SIDE / BODY VIEW



Schematic views; no fixing-hole or base-depth specification.

OVERALL WIDTH	OVERALL HEIGHT	BODY DEPTH	INSTALLATION
925 mm	2000 mm	60 mm	Floor-standing



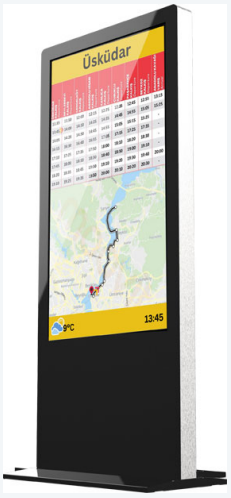

Installation planning

Published dimensions

Height, width and body depth follow the model table. Base depth is only published for Flip.

Drawing scope

Schematic only. Fixing holes, tolerances and unpublished base details need an approved production drawing.

Let us define the right mounting and system configuration for your project.

unisign / Display Technology

Technical clarity for confident deployment.

TOAS750MQ | 75" Indoor Digital Totem

Display & Application

Panel	75" title / 65" table*
Resolution	3840 × 2160
Brightness	500 nits
Active area	1649.66 × 927.936 mm
Contrast	1100:1 typ.
Response time	6 ms (G-to-G)
Viewing angle	89/89/89/89 (L/R/U/D)
Aspect ratio	16:9
Touch option	PCAP optional
Orientation	Portrait
Application	Indoor

System, Network & I/O

Processor	A: Rockchip W: Intel Core i3/i5/i7
RAM	A: 2 / 4 GB W: 4 / 8 / 16 GB
Internal storage	A: 16 / 32 GB W: 128–512 GB SSD
Operating system	A: Android W: Windows 10/11 Pro
Wi-Fi	A: 802.11 b/g/n/ac W: 802.11ac
Ethernet	A: 10/100M, managed W: Gigabit Ethernet
Bluetooth	A: 4.1 W: 4.2 / 5.0 options
Card slot	A: SD W: SD / microSD
HDMI	HDMI Out
USB	A: USB 3.0 W: USB 3.0 + 2.0
Audio	3.5 mm audio + microphone

Media & Functions

Video	A: MPEG-1/2/4, H.263/264, VC1, RV; 4K W: MPEG-1/2/4, H.264/265, AVI, MKV; 4K
Audio	A: MP3/WMA/AAC; W: MP3/WAV/AAC
Images	A: JPEG/BMP; W: JPEG/PNG
Language	Multi-language
Kiosk mode	Supported

Mechanical & Environment

Dimensions	2100 × 1060 × 115 mm
Operating temp.	0–50 °C
Humidity	10%–80%
Speaker	Optional
Depth note	Body only; base unpublished

Built for more than one deployment model


Multi-format media · **Kiosk mode** · **Flexible I/O**

* 75" heading conflicts with the 65" panel row; manufacturer confirmation required.

Engineering dimensions for installation.

TOAS750MQ | Schematic front and side views based on published data.

FRONT VIEW

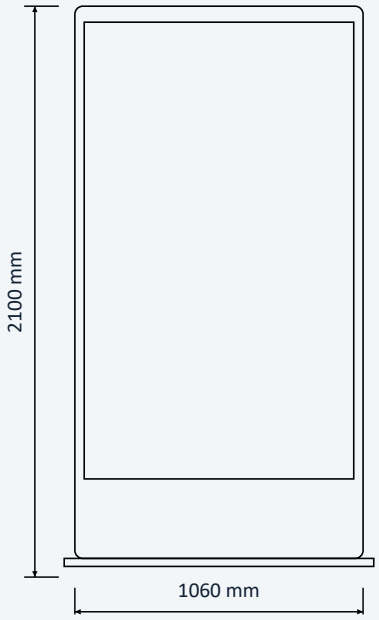

SIDE / BODY VIEW



Schematic views; no fixing-hole or base-depth specification.


OVERALL WIDTH
1060 mm

OVERALL HEIGHT
2100 mm

BODY DEPTH
115 mm

INSTALLATION
Floor-standing



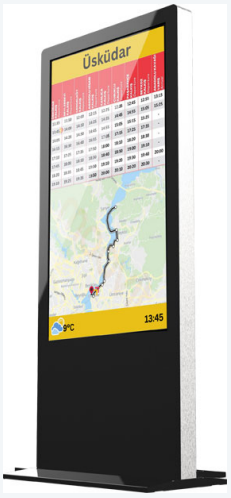

Installation planning

Published dimensions

Height, width and body depth follow the model table. Base depth is only published for Flip.


Drawing scope


Schematic only. Fixing holes, tolerances and unpublished base details need an approved production drawing.

Let us define the right mounting and system configuration for your project.

unisign Display Technology

Configure the platform. Personalise the presence.

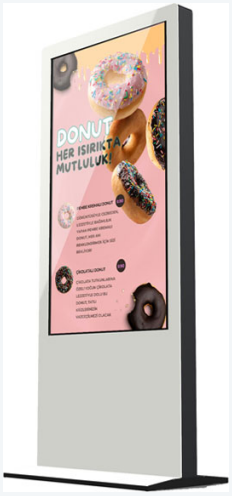

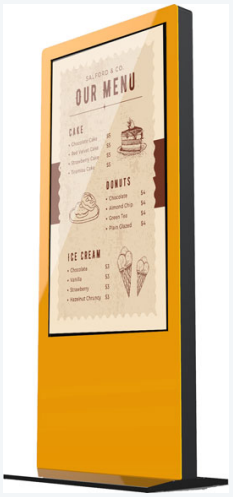

Options defined around the project

Select the computing platform, interaction and branding requirements together. Available options and peripherals must be confirmed for the exact product code before ordering.

Android or Windows

The two platforms offer different CPU, memory, storage, networking and interface specifications. Choose the configuration for your workflow.

PCAP interaction

Optional PCAP touch is described in the series overview. Confirm the touch specification and software compatibility for the selected model.

Colour and branding

Colour, logo and branding options help coordinate the physical unit with the project. Final finishes are defined in the quotation.

Optional sound

An optional speaker is listed. Confirm sound requirements, hardware scope and the final configuration before ordering.

Platform | Interaction | Branding | Configuration