55" V Model
Outdoor Digital Totem

Multiple screens. A broader visual presence.

A 55" Full HD display platform with 2500-nit brightness and double- or triple-screen options described for multi-directional communication.




2500 nits	Full HD	2 / 3 screens	Android	55"
Published value	1920 × 1080	Configurations	Platform	Screen size

Choose the display arrangement and define the installation around your project.

unisign Display Technology

Open up the view.
Extend the message.

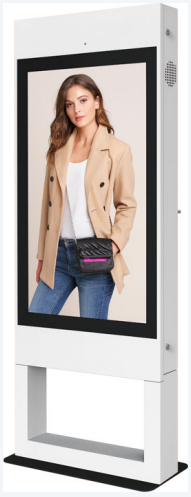





55" double- and triple-screen options

The TVAS550XA overview describes double and triple 55" screen configurations. Display resolution is 1920 × 1080 and stated brightness is 2500 nits. Final assembly details need configuration-specific confirmation.

Full HD communication

Each listed screen size is 55" with 1920 × 1080 resolution. Design content for each display face and intended viewing distance.

Double or triple screens

Two-screen and three-screen options appear in the overview. Their physical arrangement and complete footprint need approval.

Android platform

The source identifies Android. Processor, storage, connections and content-control scope require the project technical sheet.

Cabinet reference drawing

A cabinet reference shows 850 × 2000 × 150 mm. This reference does not define the complete double- or triple-screen assembly.

Retail · Hotels · Corporate · Exhibitions

unisign / Display Technology

Technical clarity for outdoor deployment.

TVAS550XA | 2 × 55" | Published source values

Display & Outdoor

Panel	55"
Resolution	1920 × 1080
Brightness	2500 nits / screen
Screen count	2
Panel reference †	1209.6 × 680.4 mm †
Definition	Full HD
Aspect ratio	16:9
Orientation	Portrait
IP rating	—*
Operating temp.	—*
Contrast	—*
Response time	—*

System & Connectivity

Platform	Android
Processor	—*
RAM	—*
Storage	—*
Wi-Fi	—*
Ethernet	—*
Bluetooth	—*
Card slot	—*
HDMI	—*
USB	—*
Touch	—*

Media & Functions

Video formats	—*
Audio formats	—*
Image formats	—*
Languages	—*
Product function	Double / triple screen

Mechanical & Power

W × H × D	850 × 2000 × 150 mm ‡
Depth scope	Body only
Weight	—*
Power draw	—*
Base / fixings	—*

A defined specification for every deployment


Screen format **Project scope** **Installation**

* Technical sheet required. † Screen-area reference, not cabinet size.
‡ Cabinet reference only; full 2/3-screen assembly dimensions require approval.

Engineering dimensions for installation.

TVAS550XA | 2 × 55" | Published dimensions and schematic views

FRONT VIEW

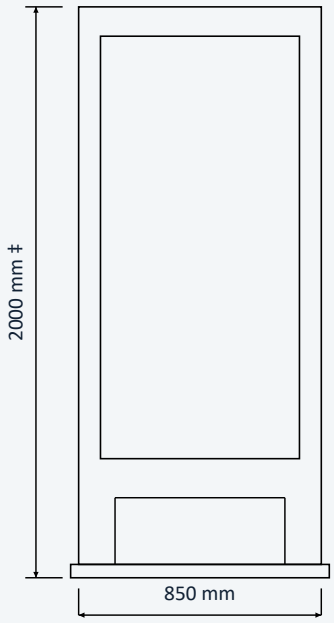


SIDE / BODY VIEW



Schematic view. Fixing holes and unpublished details are not dimensioned.

WIDTH	HEIGHT	BODY DEPTH	CONFIGURATION
850 mm	2000 mm	150 mm	2 × 55"

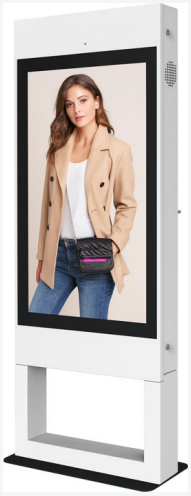



Installation planning

Dimension scope

Cabinet reference only. Full double/triple assembly and base geometry require a separate approved drawing.

Site and service access

Confirm the base footprint, anchors, power entry and maintenance clearance for the installation.

‡ Reference cabinet dimensions; full double/triple-screen assembly requires confirmation.

unisign / Display Technology

Technical clarity for outdoor deployment.

TVAS550XA | 3 × 55" | Published source values

Display & Outdoor

Panel	55"
Resolution	1920 × 1080
Brightness	2500 nits / screen
Screen count	3
Panel reference †	1209.6 × 680.4 mm †
Definition	Full HD
Aspect ratio	16:9
Orientation	Portrait
IP rating	—*
Operating temp.	—*
Contrast	—*
Response time	—*

System & Connectivity

Platform	Android
Processor	—*
RAM	—*
Storage	—*
Wi-Fi	—*
Ethernet	—*
Bluetooth	—*
Card slot	—*
HDMI	—*
USB	—*
Touch	—*

Media & Functions

Video formats	—*
Audio formats	—*
Image formats	—*
Languages	—*
Product function	Double / triple screen

Mechanical & Power

W × H × D	850 × 2000 × 150 mm ‡
Depth scope	Body only
Weight	—*
Power draw	—*
Base / fixings	—*

A defined specification for every deployment

Screen format **Project scope** **Installation**


* Technical sheet required. † Screen-area reference, not cabinet size.
‡ Cabinet reference only; full 2/3-screen assembly dimensions require approval.

unisign / Display Technology

Engineering dimensions for installation.

TVAS550XA | 3 × 55" | Published dimensions and schematic views

FRONT VIEW

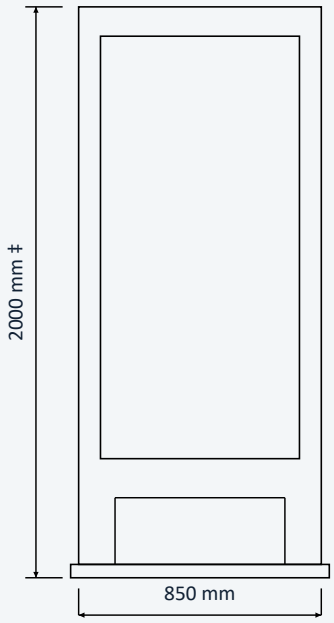


SIDE / BODY VIEW



Schematic view. Fixing holes and unpublished details are not dimensioned.

WIDTH	HEIGHT	BODY DEPTH	CONFIGURATION
850 mm	2000 mm	150 mm	3 × 55"

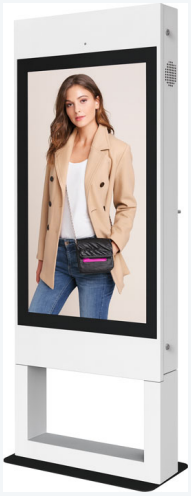



Installation planning

Dimension scope


Cabinet reference only. Full double/triple assembly and base geometry require a separate approved drawing.

Site and service access

Confirm the base footprint, anchors, power entry and maintenance clearance for the installation.

‡ Reference cabinet dimensions; full double/triple-screen assembly requires confirmation.

Define every direction.
Complete the configuration.

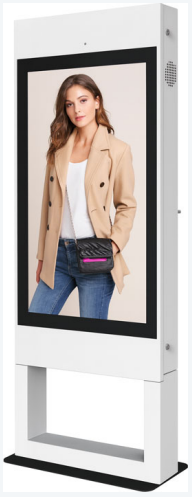



Plan the screen arrangement around the space

Treat double and triple arrangements as separate configurations. Confirm their screen orientation, enclosure, footprint, power and service-access requirements.

Two-screen configuration

Specify the required viewing directions and the relationship between the two 55" screens. Confirm the final model scope.

Three-screen configuration

Confirm the three-screen geometry and total base dimensions before making the site installation plan.

Outdoor conditions

Request the exact IP rating, operating temperature and enclosure specification for the installation location.

Content workflow

Define how content will be delivered to each display face. Confirm player, networking and software scope with the project configuration.

Platform **Interaction** **Branding** **Configuration**